

PANTOP Ø23 PENDANT

Assembly Instruction



Before you get started



Read the entire manual
before mounting




Set aside plenty of time

Cleaning: Turn off the electricity. Wipe off dust with a dry, soft cloth. If needed, clean with a soft cloth dampened in lukewarm water with a mild detergent without abrasives, solvents, alcohol or acid. Water must have evaporated before the lamp is switched on again.


Safety: Turn off the electric current before mounting. Consult a qualified electrician if in any doubt. Indoor use only. If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by the manufacturer's service agent or a qualified person.

Light source recommendation: LED, E14, 2700K, max. 25W, max. Ø8cm, CRI90+. For optimal brightness choose a light source with corresponding lumen output: for kitchen light: 500-800, and for atmospheric light choose 300-500 lumens.

Box contains:




1.



2.



3.




4.



5.

You will also need:



E14, max. 25W



Flathead
Screwdriver




Philips
Screwdriver




Screws and rawplugs
suitable for the
particular ceiling

1

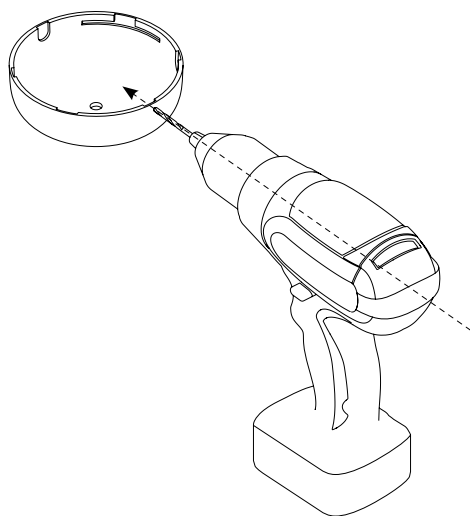


2




4


3

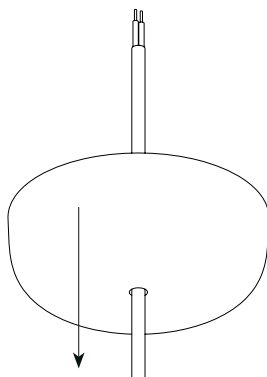



4

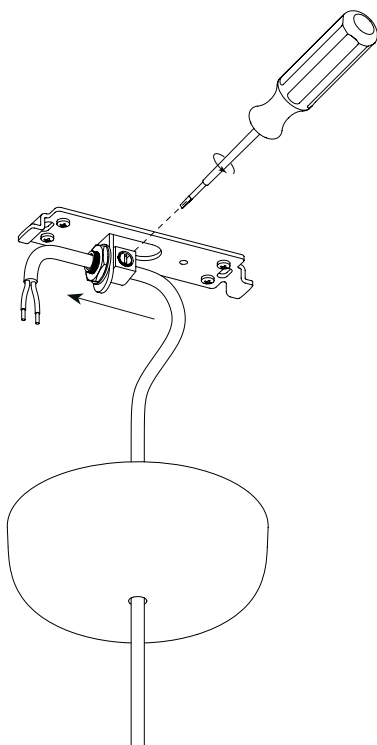



5

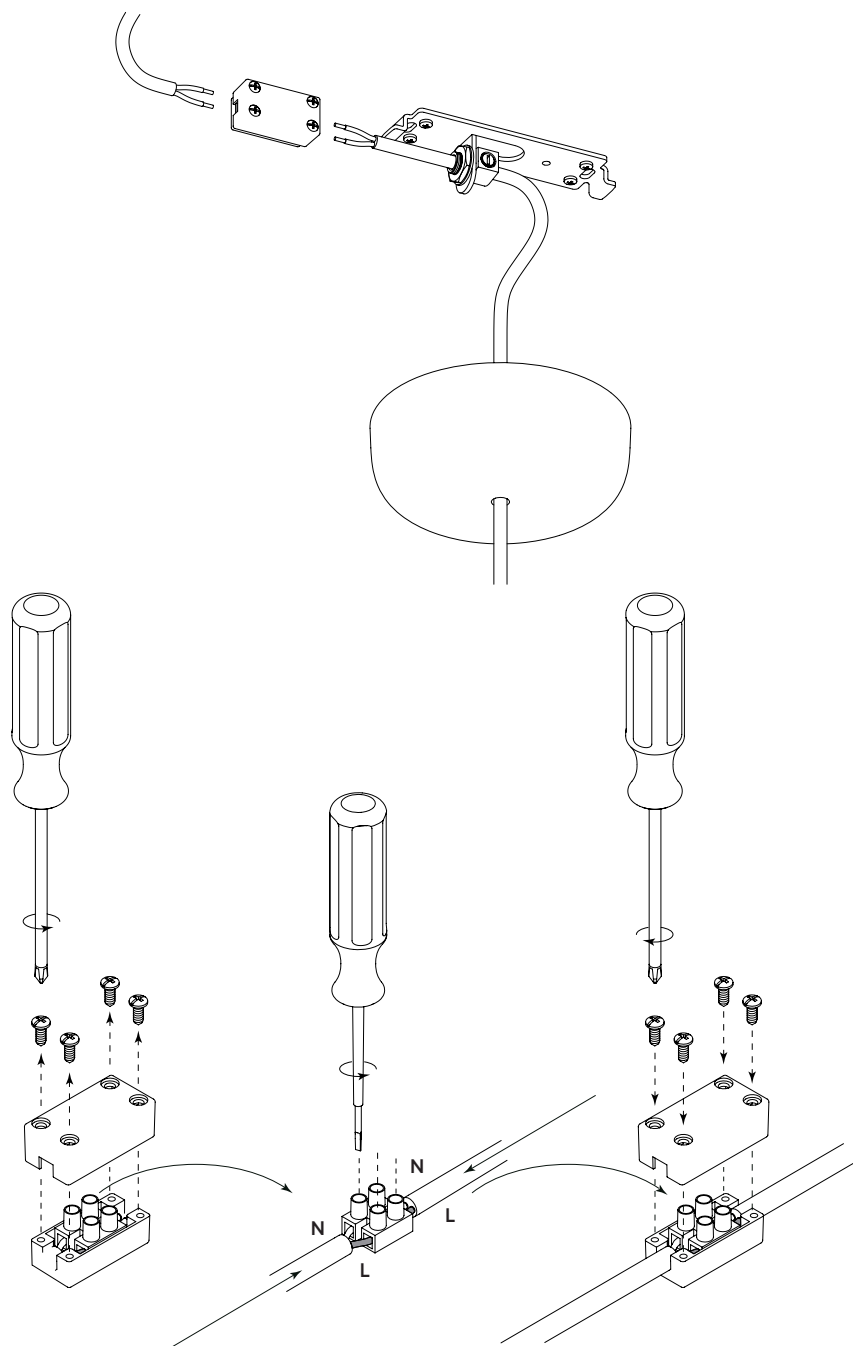

6

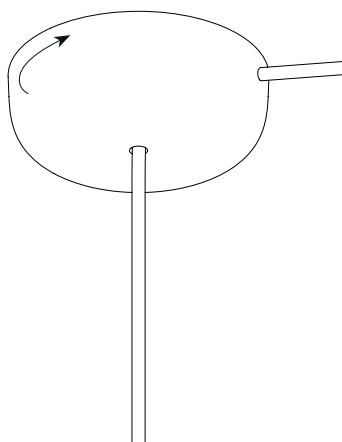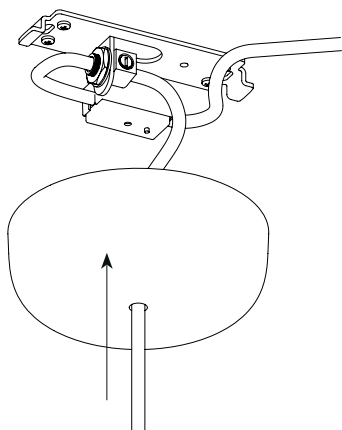

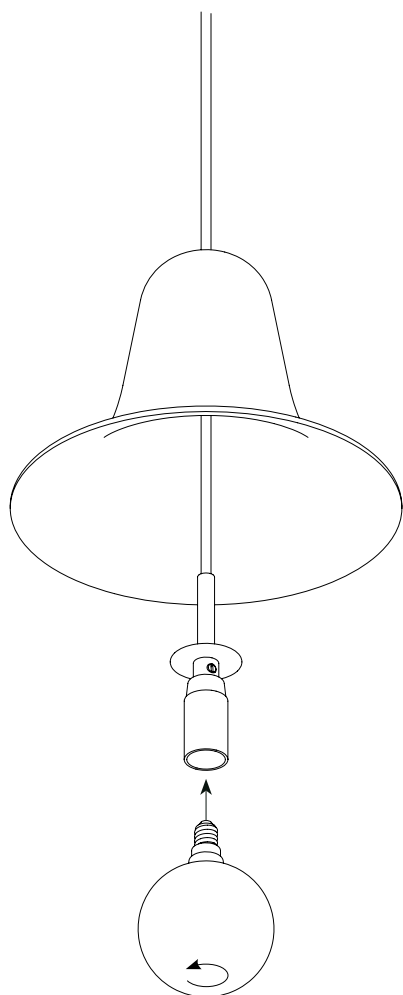

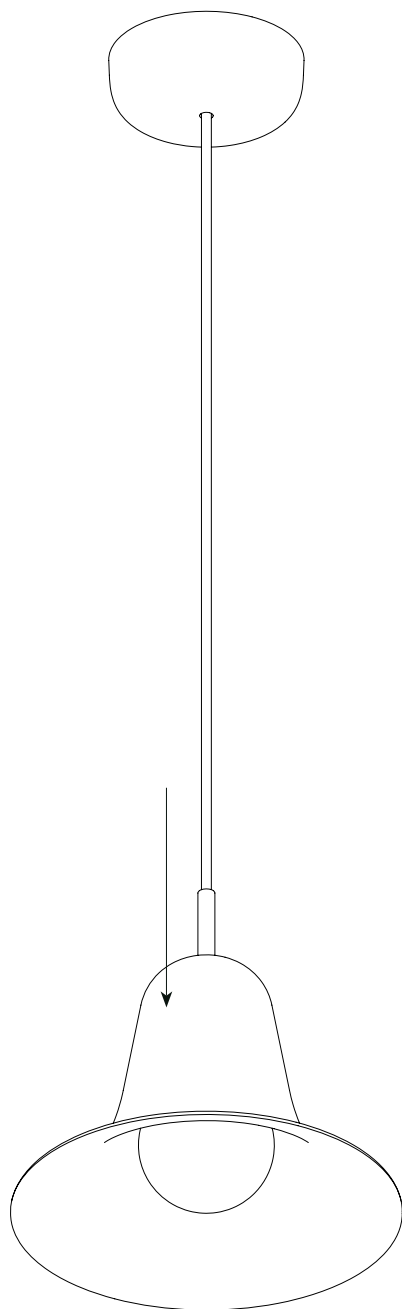



Egeskovvej 29 | 8700 Horsens | Denmark
info@verpan.com | verpan.com

Supplier fsc
logo is placed
here. Black
with no
background
width: 17mm